




**SAMPLE MODEL SELECTION**

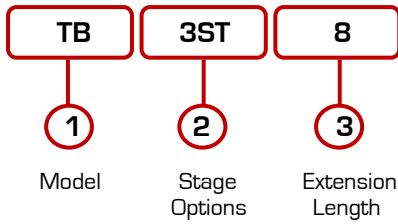


**BENEFITS:**

- ❖ Minimize loading and unloading time.
- ❖ Increase productivity.
- ❖ Easy to operate and control.
- ❖ Easy to integrate with conveyor system.
- ❖ Wide range of dimensions.
- ❖ Applicable for all industries.



**MODEL SELECTION TABLE**

① Model	TB Telescopic Boom Conveyor			
② Stage Options	3ST : 3 Stages		4ST : 4 Stages	
Power Source	AC 415V (3ph), 50Hz			
Motor Output	0.75KW	1.5KW	0.75KW	1.5KW
Closed Length, Li (mm)	4100	6000	3100	6000
③ Extension Length, Lx (mm)	5 : 5000	8 : 8000	4.5 : 4500	12 : 12000
Total Length, L (mm)	9100	14000	7600	18000
Belt Width, BW (mm)	600			
Frame Width, FW (mm)	950			
Conveyor Height, H (mm)	850			
Belt Speed (m/min)	21 (Fixed Speed)			
Load Capacity (kg/m)	50			
Belt Type	2 - Ply PVC			
Frame Construction	C - Formed Steel			

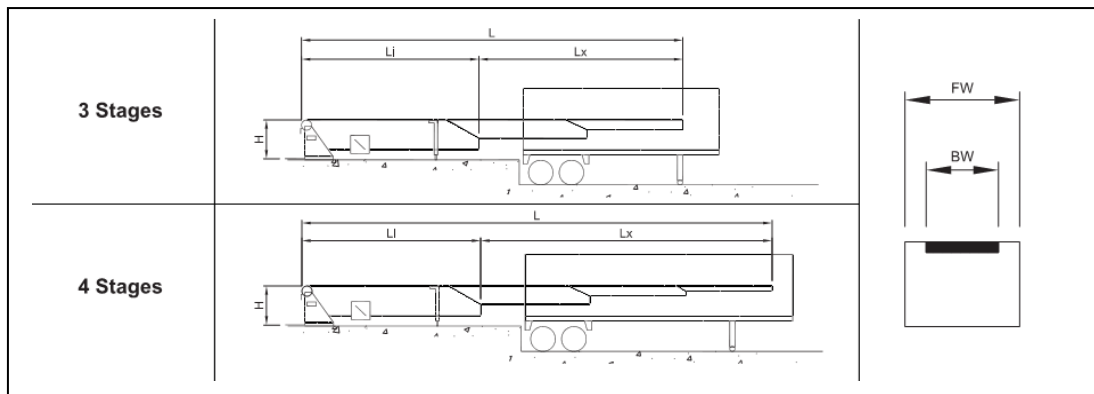

Design	Remarks
TB	Loading and Unloading of lorries and containers positioned near loading bay. Stationary position on a flat level surface, inside the building. Goods handled are to be of manageable size and weight.