






simple • reliable • quality • value

## CONVEYOR DESIGN

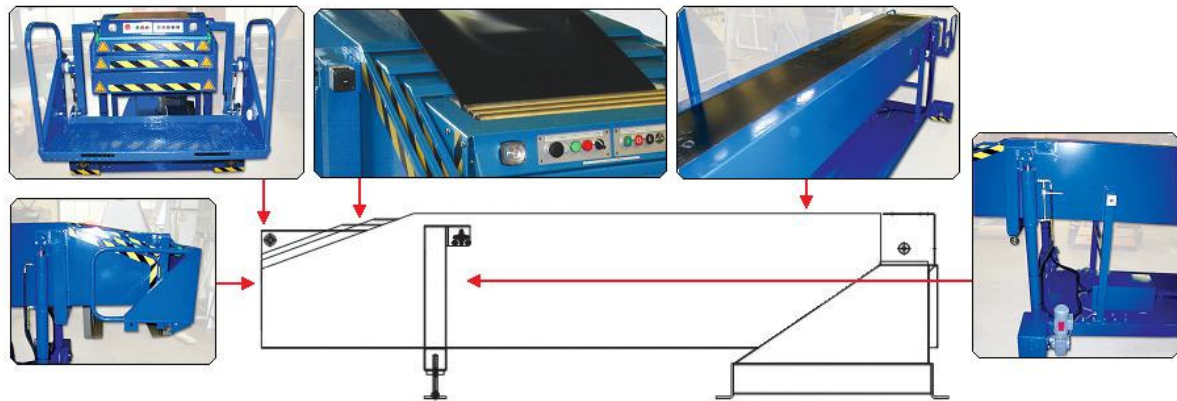

## OPTIONAL ACCESSORIES

<p><b>Hydraulic Height Adjustment</b></p>		<p>For ergonomic loading and unloading; easy reach of upper and lower levels.</p> <p><b>Hydraulic operated elevation:</b></p> <ul style="list-style-type: none"> <li>- TB-3ST-5: max. +5°</li> <li>- TB-3ST-8: max. +5° to -5°</li> <li>- TB-4ST-4,5: max. +5°</li> <li>- TB-4ST-12: max. +5° to -2°</li> </ul>
<p><b>Man-Rider Platform</b></p>	<p>Provide an easy solution for the operator to handle loading and unloading of items in the right position.</p> <p><b>Platform Dimensions:</b> 1340mm(W) x 550mm(D) x 780mm(H)</p>	
<p><b>Sideway Traverse</b></p>		<p>Able to serve multiple loading platforms with a mobile Telescopic Conveyor.</p> <p><b>Standard travel distance: 6000mm</b></p>
<p><b>Joystick</b></p>	<p>For easy operation. Allows the operator to control the telescopic movement as well as hydraulic elevation.</p>	

To place an order or for more information, kindly contact our Authorized Distributor: